


# FAUCET CARE & CLEANING INSTRUCTIONS

## Care and Cleaning of the Soup Faucet:

Clean Soup Faucet periodically with a Sparta® faucet brush (#4015400):

1. Loosen Shank Nut counterclockwise to remove faucet from pot.
2. Remove Vent Cap and turn faucet handle to open position.
3. Clean the faucet and pot with a solution of soap and hot water.
4. Use the Sparta® faucet brush (#4015400) to clean the inside of the faucet and shank.
5. Wipe dry with a clean cloth.
6. Attach faucet onto pot, tighten Shank Nut until seal is achieved.
7. Insert mushroom-shaped Strainer into shank.

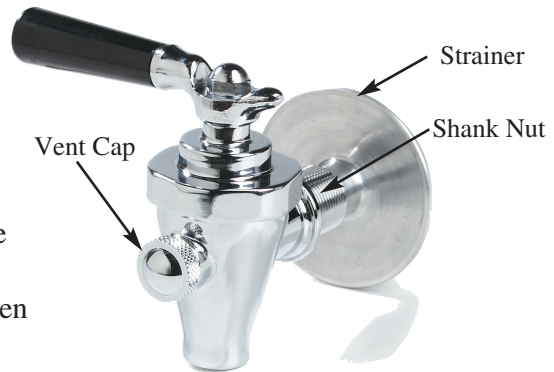


## Liquid Faucet Assembly:

1. Mate faucet to shank.
2. Tighten Union Nut to faucet counterclockwise until seal is achieved.

## Care and Cleaning of the Liquid Faucet:

Clean Liquid Faucet periodically with a Sparta® faucet brush (#4015400):

1. Loosen Union Nut in a clockwise direction to remove faucet from pot.
2. Remove entire upper assembly by unscrewing Bonnet.
3. Pull Seat Cup to remove. Clean all parts in a solution of soap and hot water.
4. Use the Sparta® faucet brush (#4015400) to clean the inside of the faucet and shank.
5. Depress handle in "lock open" position. Clean over Stem End by applying direct pressure against bottom. This is a good time to replace Seat Cup if necessary.
6. Screw upper assembly back on body.
7. Attach faucet to shank and tighten Union Nut until seal is achieved.

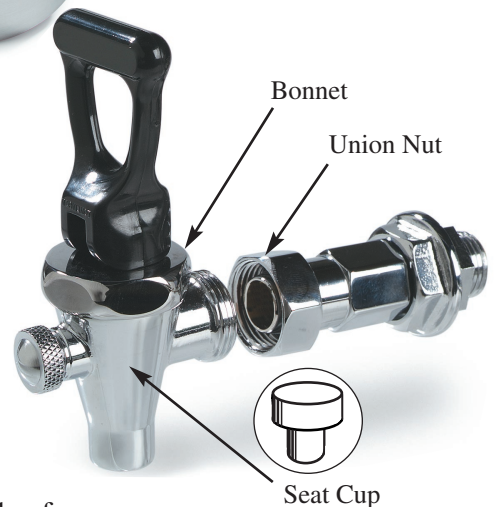

Worldwide Headquarters:  
P.O. Box 53006  
Oklahoma City, Oklahoma 73152-3006  
(405) 475-5600 • FAX (405) 475-5607  
1-800-654-8210  
#104803901 - 10/02

European Distribution Center:  
Edisonstraat 84, P.O. Box 110  
6900 AC Zevenaar, The Netherlands  
Tel +31/(0)316-596550 • Telex 45642  
FAX +31/(0)316-340168  
Web Site: www.carlislefsp.com


**CARLISLE**  
FoodService Products

# FAUCET CARE & CLEANING INSTRUCTIONS

## Care and Cleaning of the Soup Faucet:


Clean Soup Faucet periodically with a Sparta® faucet brush (#4015400):

1. Loosen Shank Nut counterclockwise to remove faucet from pot.
2. Remove Vent Cap and turn faucet handle to open position.
3. Clean the faucet and pot with a solution of soap and hot water.
4. Use the Sparta® faucet brush (#4015400) to clean the inside of the faucet and shank.
5. Wipe dry with a clean cloth.
6. Attach faucet onto pot, tighten Shank Nut until seal is achieved.

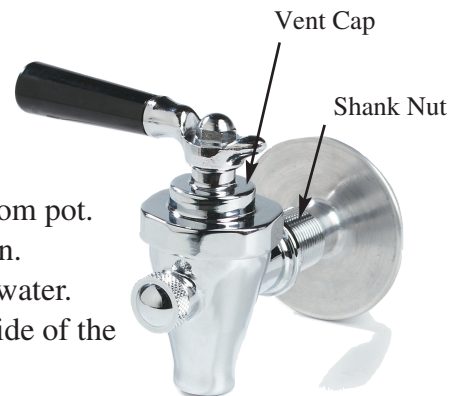

## Liquid Faucet Assembly:

1. Mate faucet to shank.
2. Tighten Union Nut to faucet counterclockwise until seal is achieved.

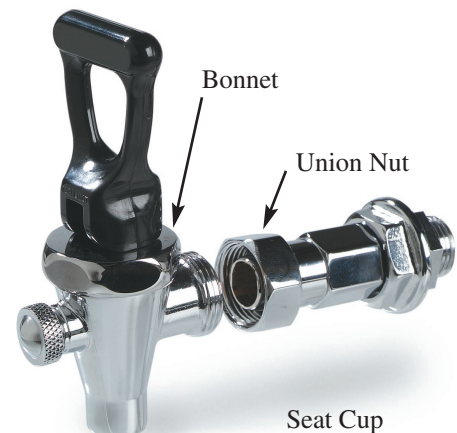

## Care and Cleaning of the Liquid Faucet:

Clean Liquid Faucet periodically with a Sparta® faucet brush (#4015400):

1. Loosen Union Nut in a clockwise direction to remove faucet from pot.
2. Remove entire upper assembly by unscrewing Bonnet.
3. Pull Seat Cup to remove. Clean all parts in a solution of soap and hot water.
4. Use the Sparta® faucet brush (#4015400) to clean the inside of the faucet and shank.
5. Depress handle in "lock open" position. Clean over Stem End by applying direct pressure against bottom. This is a good time to replace Seat Cup if necessary.
6. Screw upper assembly back on body.
7. Attach faucet to shank and tighten Union Nut until seal is achieved.

Worldwide Headquarters:  
P.O. Box 53006  
Oklahoma City, Oklahoma 73152-3006  
(405) 475-5600 • FAX (405) 475-5607  
1-800-654-8210  
#104803901 - 10/02

European Distribution Center:  
Edisonstraat 84, P.O. Box 110  
6900 AC Zevenaar, The Netherlands  
Tel +31/(0)316-596550 • Telex 45642  
FAX +31/(0)316-340168  
Web Site: [www.carlislefsp.com](http://www.carlislefsp.com)

**CARLISLE**  
FoodService Products