

ANGLE RACKS

Compliant with
NSF/ANSI Standard 2



DXP612

Item Numbers

DXP612
DXP620
DXP630
DXPR611
DXPR618
DXPR626

Dinex Angle Racks are designed for in-house foodservice facilities, bakeries, restaurants and high-activity operations handling trayed product.

Our fully welded frame and 0.50" aluminum tie bar avoids distortion and gives greater side-to-side strength. Add that to our unique Dinex-engineered base and casters and you have the finest Angle Rack in the industry.

Tie Bars And Continuous Weld

- 0.50" extruded aluminum tie bar keeps rack square
- Adds rigidity and stability to rack
- Two tie bars per unit
- Weld along entire edge of glides
- No gaps to promote bacterial growth
- Solid Bottom Standard

Dimensions

DXP612 – 21" x 27" x 67.13"
DXP620 – 21" x 27" x 67.13"
DXP630 – 21" x 27" x 67.13"
DXPR611 – 21" x 27" x 64.75"
DXPR618 – 21" x 27" x 64.75"
DXPR626 – 21" x 27" x 64.75"

Solid Bottom

- Rolled edge acts as bumper
- 12 gauge reinforcing caster channel eliminates twisting
- Fully welded corners
- Greatly enhances rack strength
- .090" thick aluminum

Superior Corner Supports

- 0.190" thick gussets provide superior strength
- Extruded 3-sided channel support
- All sides fully welded

Heavy-Duty Casters

- Plate casters for added rigidity and stability
- 5" x 1.25" sealed wheels
- Delrin bearing, each with 350 lbs. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility for superior performance, even in freezing temperatures

Warranty

One year parts and labor.


*We do not accept returns on any Dinex equipment or Dinex custom products.
Please contact your local Dinex rep to ensure order accuracy prior to ordering.*

DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com

Rev 03/2020




ANGLE RACKS

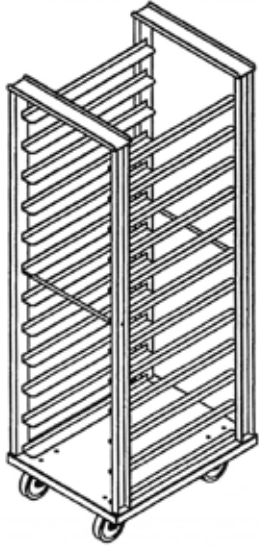

Dinex Superior Foundation

Featured on our toughest racks: Two 12 gauge aluminized steel reinforcing channels support our .090" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and plate casters make this the strongest foundation in the industry.

built-in bumper and plate casters make this the strongest foundation in the industry.

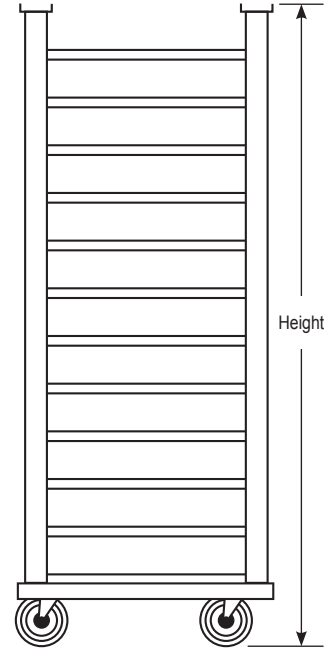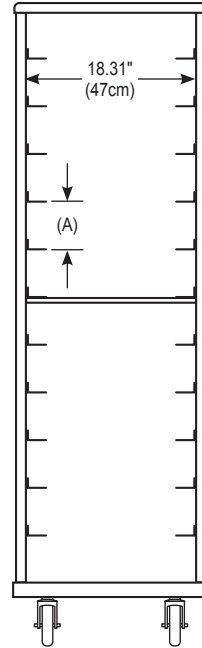

Glides are 1" x 2" x .080" thick, extruded aluminum welded front and back to the frame

Items and Dimensions

ITEM NUMBER	DESCRIPTION	WIDTH	DEPTH	HEIGHT*	CHANNEL SPACING (A)	MAX PAN CAPACITY (18" X 26" PAN)	SHIP WEIGHT	SHIP CUBE
DXP612	Knock Down End Load	21" (53cm)	27" (69cm)	67.13" (170cm)	5" (13cm)	12	85 lbs (39kg)	22.03
DXP620	Knock Down End Load	21" (53cm)	27" (69cm)	67.13" (170cm)	3" (8cm)	20	100 lbs (45kg)	22.03
DXP630	Knock Down End Load	21" (53cm)	27" (69cm)	67.13" (170cm)	2" (5cm)	30	125 lbs (57kg)	22.03
DXPR611	Knock Down End Load	21" (53cm)	27" (69cm)	64.75" (164cm)	5" (13cm)	11	75 lbs (34kg)	21.54
DXPR618	Knock Down End Load	21" (53cm)	27" (69cm)	64.75" (164cm)	3" (8cm)	18	90 lbs (41kg)	21.54
DXPR626	Knock Down Roll-In End Load	21" (53cm)	27" (69cm)	64.75" (164cm)	3" (13cm)	26	100 lbs (45kg)	21.54

* Height includes casters

Custom sizes and glide spacing available

- Typical freight class: 250

Options

ITEM NO	DESCRIPTION
DXPPS	Pan Stop
DXPEMB	Personalized Embossment (12 letters per line)
DXPFL	Floor Lock
DXPPH	Push Handle
DXPY5	5" Polyurethane Casters (set of 4)

ITEM NO	DESCRIPTION
DXPBB	Non-Marking Rubber Bumpers - Corner (set of 4)
DXPPB	Non-Marking Rubber Bumpers - Full Perimeter
DXPWB	Wheel Brakes (set of 2)
DXP52	Heavy-duty Casters (set of 4)
DXPVB	Vertical Bumpers

Please confirm that you have the most current specification sheet by visiting www.dinex.com.

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com