


CAN RACKS

Compliant with
NSF/ANSI Standard 2



DXPCSRFF156

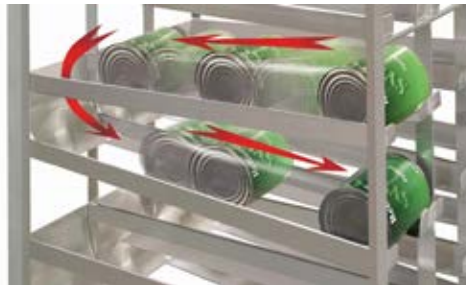

DXPCSR-FF-156
Front Loading System

Item Numbers

DXPCSR84
DXPCSRFF156
DXPCSR210
DXPCSR308

Frame

The vertical corner uprights and the top and bottom cross bracing are constructed of all welded 1.5" x 1.5" x 1/8" thick extruded aluminum angles. The front and rear center uprights are 1.5" wide x 0.25" thick aluminum, welded to the top and bottom cross braces.

Guides

The guides are 1" x 2" x 1/8" thick, formed aluminum angles with front and rear edges turned up 1". The guides are welded to the uprights on 7.25" centers to accommodate No. 10 cans, with the rear of the guide 1.5" higher than the front to allow the cans to roll forward.

Model DXPCSR-84

The unit is mobile, mounted on four 5" diameter, heavy duty, swivel casters. The top is 16 ga. stainless steel with all edges turned down 1.5", securely fastened to the frame. This unit is loaded from the rear.

Model DXPCSR-210

The unit is stationary, mounted on four adjustable flanged feet welded to the uprights. The top is .060" thick aluminum with all edges turned down 1.5", welded securely to the uprights. This unit is loaded from the rear.

Model DXPCSR-308

The unit is the same as Model DXPCSR-210, except that it is constructed to accommodate No. 5 cans. The guides are set on 5-3/16" centers in lieu of 7.25". This unit is loaded from the rear.

Model DXPCSR-FF-156

The unit is the same as Model DXPCSR-210 except that it is front loading. The loading guides are inclined to the rear, where an aluminum deflector transfers the cans to unloading guides below which are inclined towards the front. Used where installation prevents rear loading.

Dimensions

DXPCSR84 – 25.75"W x 42.5"D x 40.75"H
DXPCSR210 – 25.75"W x 42.5"D x 86.5"H
DXPCSR308 – 25.75"W x 42.5"D x 72.75"H
DXPCSRFF156 – 27.25"W x 42"D x 81.06"H

Warranty

One year parts and labor.

*We do not accept returns on any Dinex equipment or Dinex custom products.
Please contact your local Dinex rep to ensure order accuracy prior to ordering.*

DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com

Rev 03/2020

CAN RACKS

Items and Dimensions

ITEM NUMBER	WIDTH	DEPTH	HEIGHT	CAN CAPACITY	SHIP WEIGHT	SHIP CUBE
DXPCSR84	25.75" (65cm)	42.5" (108cm)	40.75" (104cm)	84 #10 cans	135 lbs (61kg)	25.81
DXPCSR210	25.75" (65cm)	42.5" (108cm)	86.5" (220cm)	210 #10 cans	200 lbs (91kg)	54.78
DXPCSR308	25.75" (65cm)	42.5" (108cm)	72.75" (185cm)	308 #5 cans	230 lbs (104kg)	46.07
DXPCSRFF156	27.25" (69cm)	42" (107cm)	81.06" (206cm)	156 #10 cans	200 lbs (91kg)	54.33

NOTE: Other sizes and capacities available.

Legs standard on DXPCSR210, DXPCSR308 and DXPCSRFF156.

Options

ITEM NO	DESCRIPTION
DXPY5	5" Polyurethane Casters (set of 4)
DXPWB	Wheel Brakes (set of 2)

Please confirm that you have the most current specification sheet by visiting www.dinex.com.

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com