

CHANNEL RACKS

Compliant with
NSF/ANSI Standard 2



DXP612

Item Numbers

DXP612
DXP620
DXP630
DXPR611
DXPR618
DXPR626

Dinex Channel Racks are designed so that you can partially withdraw a tray and not worry about tipping. The choice of front or side loading models lets you choose a style that works for you. In the fast-paced worlds of bakery production and food services, capacity and rigidity are qualities greatly in demand. Dinex Channel Racks deliver these qualities economically and with superior strength.

Standard Features

- Strong, solid-bottom foundation
- No-tip channel design
- Rigid, quality construction
- Solid bottom

Channels

- 1.5" standard spacing
- Provides flexibility in pan spacing
- Fully welded

Tie Bars

- 0.5" extruded aluminum tie bar keeps rack square
- Adds rigidity and stability to rack

Dimensions

DXP733 – 57.25"H x 21"W x 27.38"
DXP741 – 69.25"H x 21"W x 27.37"
DXP733S – 57.25"H x 29.13"W x 19.13"
DXP741S – 69.25"H x 29.25"W x 19.13"

Solid Bottom

- Rolled edge acts as bumper
- 14 gauge reinforcing caster channel eliminates twisting
- Fully welded corners
- Greatly enhances rack strength
- 0.13" thick aluminum

Superior Corner Supports

- Extruded 3-sided channel support
- 0.190" thick gussets provide superior strength

Heavy-Duty Casters

- Plate casters for added rigidity and stability
- 5" x 1.25" sealed wheels
- Delrin bearing, each with 350 lbs. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility for superior performance, even in freezing temperatures
- Optional 5" x 2" size available

Warranty


One year parts and labor.

CHANNEL RACKS




Dinex Superior Foundation


Featured on our toughest racks: Two 12 gauge aluminized steel reinforcing channels support our 0.13" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and plate casters make this the strongest foundation in the industry.




Channel Profile



Top

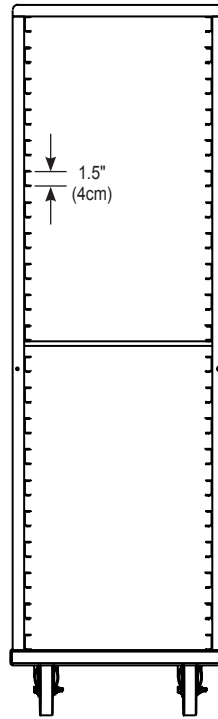

Front

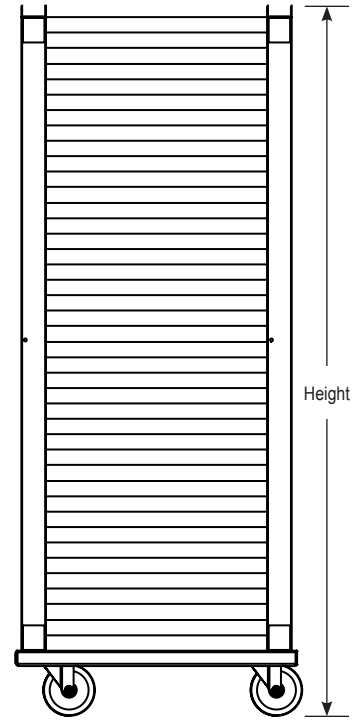

Side

Items and Dimensions

ITEM NUMBER	DESCRIPTION	WIDTH	DEPTH	HEIGHT*	CHANNEL SPACING	MAX PAN CAPACITY (18" X 26" PAN)	SHIP WEIGHT	SHIP CUBE
DXP733	Channel Rack, End Load	21" (53cm)	27.38" (70cm)	57.25" (145cm)	1.5" (4cm)	33	65 lbs (29kg)	19.05
DXP741	Channel Rack, End Load	21" (53cm)	27.38" (70cm)	69.25" (176cm)	1.5" (4cm)	41	70 lbs (32kg)	23.04
DXP733S	Channel Rack, Side Load	29.13" (74cm)	19.13" (49cm)	57.25" (145cm)	1.5" (4cm)	33	65 lbs (29kg)	18.45
DXP741S	Channel Rack, Side Load	29.13" (74cm)	19.13" (49cm)	69.25" (176cm)	1.5" (4cm)	41	70 lbs (32kg)	22.32

* Height includes casters
Custom height sizes and glide spacing available

- Typical freight class: 250

Options

ITEM NO	DESCRIPTION
DXPPS	Pan Stop
DXPEMB	Personalized Embossment (12 letters per line)
DXPFL	Floor Lock
DXPPH	Push Handle
DXPY5	5" Polyurethane Casters (set of 4)

ITEM NO	DESCRIPTION
DXPB	Non-Marking Rubber Bumpers - Corner (set of 4)
DXPPB	Non-Marking Rubber Bumpers - Full Perimeter
DXPWB	Wheel Brakes (set of 2)
DXP52	Heavy-duty Casters (set of 4)
DXPV	Vertical Bumpers

Please confirm that you have the most current specification sheet by visiting www.dinex.com.

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



DINEX

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com