

## CLOSED SIDE RACKS

Compliant with  
NSF/ANSI Standard 2



DXP841-S

### Item Numbers

DXP822  
DXP841  
DXPR836  
DXP822S  
DXP841S

Dinex Closed-Side Racks give you all the features of our popular Channel Racks with the advantage of closed sides for strength and added rigidity. The welded ledges prevent trays from tipping, and are spaced only 1.5" apart. The racks offer the ultimate in capacity and versatility. With solid tongue and groove side panel construction the ledges stay level and rigid even after being abused, unlike competitors' corrugated side panels that may become misaligned making the trays bind.

### Standard Features

- Holds 18" x 26" sheet pans
- 1.5" glide spacing
- Solid Bottom

### Tie Bars And Continuous Weld

- 1/2" extruded aluminum tie bar keeps rack square
- Adds rigidity and stability to rack
- Two tie bars per unit
- Weld along entire edge of glides
- No gaps to promote bacterial growth

### Dimensions

DXP822 – 40.75"H x 21"W x 27.38D"  
DXPR836 – 64.5"H x 21"W x 27.38D"  
DXP841 – 69.25"H x 21"W x 27.38D"  
DXP822S – 40.75"H x 27.38"W x 21"D  
DXP841S – 69.25"H x 27.37"W x 21"D

### Solid Bottom

- Rolled edge acts as bumper
- 12 gauge reinforcing caster channel eliminates twisting
- Fully welded corners
- Greatly enhances rack strength
- .090" thick aluminum

### Superior Corner Supports

- 0.19" thick gussets provide superior strength
- Extruded 3-sided channel support
- All sides fully welded

### Heavy-Duty Casters

- Plate casters for added rigidity and stability
- 5" x 1.25" sealed wheels
- Delrin bearing, each with 350 lbs. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility for superior performance, even in freezing temperatures

### Warranty

One year parts and labor.

*We do not accept returns on any Dinex equipment or Dinex custom products.  
Please contact your local Dinex rep to ensure order accuracy prior to ordering.*

# DINEX®

4711 E. Hefner Road  
Oklahoma City, OK 73131  
800.654.8210 | 405.475.5600  
www.dinex.com


Rev 03/2020

# CLOSED SIDE RACKS




## Dinex Superior Foundation


Featured on our toughest racks: Two 12 gauge aluminized steel reinforcing channels support our 0.13" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and plate casters make this the strongest foundation in the industry.




Top

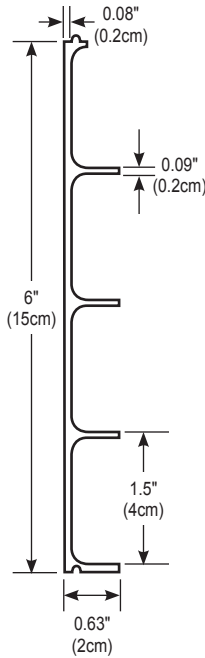

Channel Profile

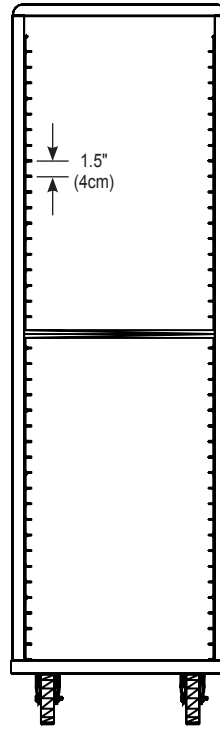

Front

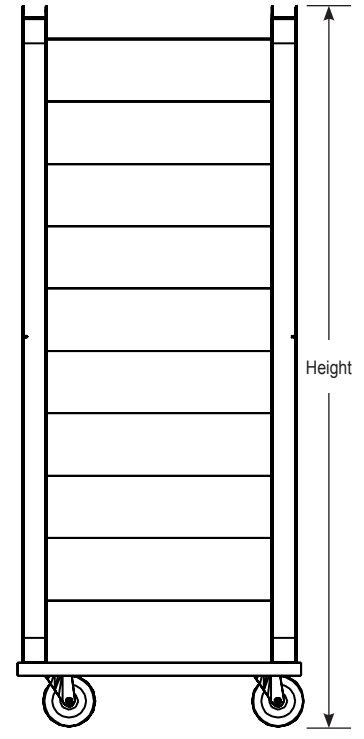

Side

## Items and Dimensions

| ITEM NUMBER | DESCRIPTION                 | WIDTH         | DEPTH         | HEIGHT*        | CHANNEL SPACING | MAX PAN CAPACITY (18" X 26" PAN) | SHIP WEIGHT   | SHIP CUBE |
|-------------|-----------------------------|---------------|---------------|----------------|-----------------|----------------------------------|---------------|-----------|
| DXP822      | Closed Side Rack, End Load  | 21" (53cm)    | 27.38" (70cm) | 40.75" (104cm) | 1.5" (4cm)      | 22                               | 70 lbs (32kg) | 13.56     |
| DXPR836     | Closed Side Rack, End Load  | 21" (53cm)    | 27.38" (70cm) | 64.25" (163cm) | 1.5" (4cm)      | 41                               | 79 lbs (36kg) | 21.46     |
| DXP841      | Closed Side Rack, End Load  | 21" (53cm)    | 27.38" (70cm) | 69.25" (176cm) | 1.5" (4cm)      | 41                               | 88 lbs (40kg) | 31.45     |
| DXP822S     | Closed Side Rack, Side Load | 27.38" (70cm) | 21" (53cm)    | 40.75" (104cm) | 1.5" (4cm)      | 22                               | 70 lbs (32kg) | 13.14     |
| DXP841S     | Closed Side Rack, Side Load | 27.38" (70cm) | 21" (53cm)    | 69.25" (176cm) | 1.5" (4cm)      | 41                               | 88 lbs (40kg) | 2.32      |

\* Height includes casters  
Custom height sizes and glide spacing available

• Typical freight class: 250

## Options

| ITEM NO | DESCRIPTION                                   |
|---------|-----------------------------------------------|
| DXPPS   | Pan Stop                                      |
| DXPEMB  | Personalized Embossment (12 letters per line) |
| DXPFL   | Floor Lock                                    |
| DXPPH   | Push Handle                                   |
| DXPY5   | 5" Polyurethane Casters (set of 4)            |

| ITEM NO | DESCRIPTION                                    |
|---------|------------------------------------------------|
| DXPBB   | Non-Marking Rubber Bumpers – Corner (set of 4) |
| DXPPB   | Non-Marking Rubber Bumpers – Full Perimeter    |
| DXPWB   | Wheel Brakes (set of 2)                        |
| DXP52   | Heavy-Duty Casters (set of 4)                  |
| DXPV    | Vertical Bumpers                               |

Please confirm that you have the most current specification sheet by visiting [www.dinex.com](http://www.dinex.com).

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



# DINEX

4711 E. Hefner Road  
Oklahoma City, OK 73131  
800.654.8210 | 405.475.5600  
[www.dinex.com](http://www.dinex.com)