

## HEATED PROOFER CABINETS

Compliant with  
NSF/ANSI Standard 2



### Item Numbers

- DXP915H
- DXP934H
- DXP1015 (Insulated)
- DXP1034 (Insulated)

Dinex Aluminum Heated Cabinets/Proofers are designed with features to make your operation efficient. Controls can be easily accessed at the front of the Cabinet without opening the doors and the entire heater unit can be removed for cleaning and maintenance.

### Standard Features

- Base is a solid bottom constructed of 0.125" aluminum, rolled edge base acts as a built-in bumper
- Two 14-gauge aluminized steel reinforcing channels attach the casters and support the bottom panel
- Frame consist of four extruded channels 1.5" x 0.63" x 0.094" aluminum. Corners have 0.190" channel supports for reinforcement
- Double pan top constructed of two 0.080" thick aluminum panels, fully welded corners
- Glides are channels spaced on 1.5" centers with 0.63" ledge, 0.090" thick extruded aluminum continuously welded to the frame
- Door panel is 0.125" PVC coated aluminum attached to cabinet with bakery hinges, 270° door swing with card clip

- Back panel is 0.080" aluminum fully welded with removable multiple louvered vent stack
- 0.50" extruded aluminum tie bar keeps cabinet square
- 16-gauge stainless steel positive gravity latch is provided to keep door closed during transport
- Stainless steel side door latch holds door open
- One inch insulation surround the cabinet (Insulated models only)
- Card clip, easy identification of cabinet content when door is closed

### Dimensions

- DXP915H - 40.75" H x 21.5" W x 31" D
- DXP934H - 68.75" H x 25" W x 31" D
- DXP1034 - 68.75" H x 21.5" W x 31" D
- DXP1015 (Insulated) - 40.75" H x 21.5" W x 31" D
- DXP1034 (Insulated) - 68.75" H x 21.5" W x 31" D

### Heat System

- Individual heat and food moisture controls
- Digital read-out for accuracy
- Stainless steel 1 gallon water pan

- Unit removable for easy cleaning and maintenance
- 60 minute timer
- 120V, 12.5 AMP, 1500 watts

### Heavy-Duty Casters

- 5" diameter x 1/1/4" wide swivel sealed wheels, two with brakes
- 350 lb. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility or superior performance even in freezing temperatures

### Common Options

- Lexan full-view door
- Push handle
- Dutch doors
- Personalized embossment
- See reverse side for additional options

### Warranty


One year parts and labor.

**We do not accept returns on any Dinex equipment or Dinex custom products.  
Please contact your local Dinex rep to ensure order accuracy prior to ordering.**





# DINEX®

4711 E. Hefner Road  
Oklahoma City, OK 73131  
800.654.8210 | 405.475.5600  
www.dinex.com

# HEATED PROOFER CABINETS

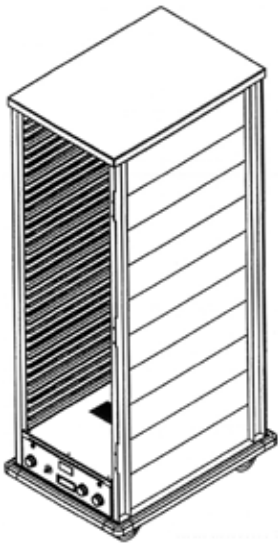

Unit shown without door for interior detail

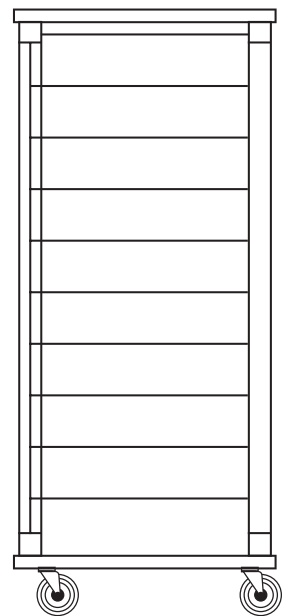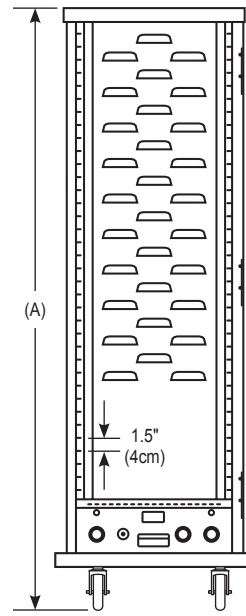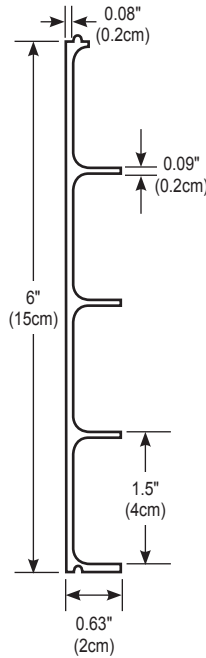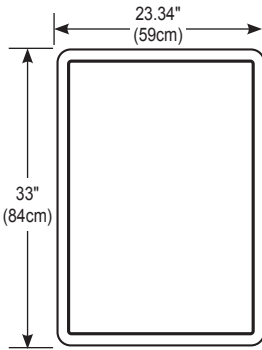

## Items and Dimensions

ITEM NUMBER	DESCRIPTION	WIDTH*	DEPTH	HEIGHT* (A)	CHANNEL SPACING	MAX PAN CAPACITY**	SHIPPING CLASS	SHIP WEIGHT	SHIP CUBE
<b>NON-INSULATED</b>									
DXP915H	Half Size	21.5" (55cm)	31" (cm)	40.75" (104cm)	1.5" (4cm)	15	100	140 lbs (64kg)	15.72
DXP934H	Full Size	21.5" (55cm)	31" (cm)	68.75" (175cm)	1.5" (4cm)	34	100	190 lbs (86kg)	26.52
<b>INSULATED</b>									
DXP1015	Half Size	21.5" (55cm)	31" (cm)	40.75" (104cm)	1.5" (4cm)	15	100	160 lbs (73kg)	15.72
DXP1034	Full Size	21.5" (55cm)	31" (cm)	68.75" (175cm)	1.5" (4cm)	34	100	260 lbs (118kg)	15.72

NOTE: All models 120V, 12.5 AMP, 1500W


\*\* Pan capacities are for 18" x 26" sheet pans

\* Height includes casters

## Options

ITEM NO	DESCRIPTION
DXPLD	Lexan full-view door
DXPDD	Dutch door, only available on 941 units
DXPCH	Chest handles, set of 2
DXPEMB	Personalized embossment, 12 letters per line
DXPPH	Push handle
DXPI	Insulating transport cabinet
DXPB	Set of 4 non-marking rubber corner bumpers
DXPPB	Full perimeter non-marking bumper
DXPWB	Wheel brakes, set of 2
DXP5X2	Heavy-duty casters, set of 4
DXPCP	Correctional package, includes welded casters and hole in door latch for paddlelock
DXPCHT2	Canned heat tray insert

## TEMPERATURE PROFILE

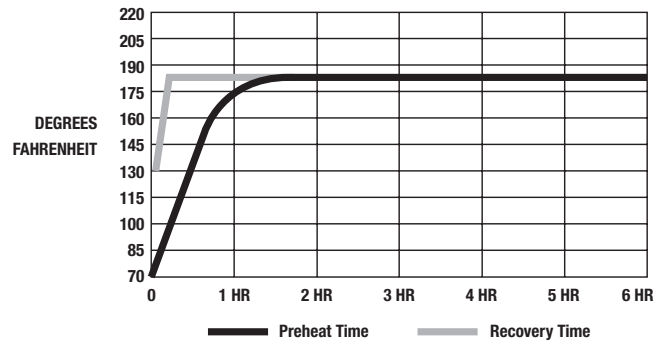

ITEM NO	DESCRIPTION
DXPY4	Polyurethane 4" casters DXPset of 4)
DXPY5	Polyurethane 5" casters DXPset of 4)
DXPFL	Floor lock

Please confirm that you have the most current specification sheet by visiting [www.dinex.com](http://www.dinex.com).

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

