

TRANSPORT CABINETS

Compliant with
NSF/ANSI Standard 2



DXP941

Dinex Transport Cabinets are built extra-strong to withstand the rigors of transporting bakery and food service products. A welded bottom ensures rigidity as well as permits forklift loading and unloading. Heavy duty plate casters promote easy mobility, and with many sizes to choose from, storage space will never be a problem.

Model Differences

- Model DXP941 is the standard cabinet. This unit does not have U-Channels built into the back and door of the cabinet
- Model DXP941-EX is an extended depth cabinet with the same general construction as the standard DXP941 unit. This unit does not have U-Channels built into the back and door of the cabinet. The DXP941-EX will hold 2, 14x18 trays per slide.
- Model DXP941-HD does have the U-Channels built into the back and door of the cabinet. It also has double tie bars and L bracket corner supports at the top and bottom of the cabinet. This unit also has a louvered back panel.

Standard Features

- Base is a solid bottom constructed of 0.125" aluminum, rolled edge base acts as a built-in bumper
- Two 14-gauge aluminized steel reinforcing channels attach the casters and support the bottom panel
- Frame consist of four extruded channels 1.5" x 0.63" x .094" aluminum. Corners have 0.190" channel supports for reinforcement
- Double pan top constructed of two .080" thick aluminum panels, fully welded corners
- Glides are channels spaced on 1.5" centers with 0.63" ledge, 0.090" thick extruded aluminum continuously welded to the frame
- Door panel is 0.125" PVC coated aluminum attached to cabinet with bakery hinges, 270° door swing with card clip
- Back panel is 0.080" aluminum fully welded
- 0.50" extruded aluminum tie bar keeps cabinet square
- 16-gauge stainless steel positive gravity latch is provided to keep door closed during transport
- Stainless steel side door latch holds door open
- One inch insulation surround the cabinet (Insulated models only)
- Card clip, easy identification of cabinet content when door is closed
- DXP941-EX features 4 Tie bars (2 in front, 2 in back).
- DXP941-HD features heavy duty corner gussets on the top panel for extra support

Item Numbers

DXP918
DXP922
DXP926
DXP933
DXP936
DXP941
DXP941EX
DXP941HD

Dimensions

DXP918 – 34.75" x 21" x 27.38"
DXP922 – 40.75" x 21" x 27.38"
DXP926 – 46.75" x 21" x 27.38"
DXP933 – 57.25" x 21" x 27.38"
DXP936 – 63.25" x 21" x 27.38"
DXP941 – 69.25" x 21" x 27.38"
DXP941EX – 69.75" x 21" x 31"
DXP941HD – 69.75" x 21" x 31"

Heavy-Duty Casters

- 5" diameter x 1.25" wide swivel sealed wheels
- 350 lb. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility or superior performance even in freezing temperatures

Common Options

- Wheel brakes
- Push handle
- Chest handles
- Personalized embossment
- See reverse side for additional options

Warranty

One year parts and labor.

DINEX®



4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com

TRANSPORT CABINETS



Dinex Superior Foundation

Featured on our toughest cabinets: Two 14 gauge aluminized steel reinforcing channels support our .080" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and heavy duty plate casters make this the strongest foundation in the industry.

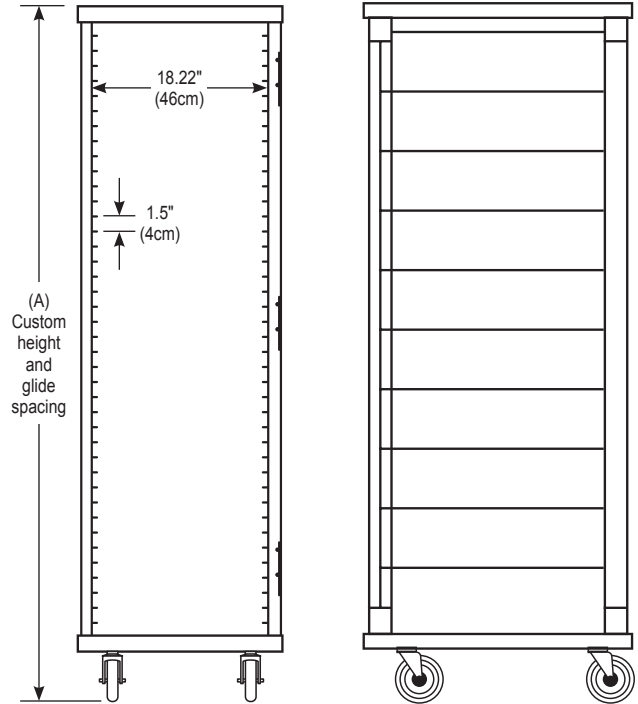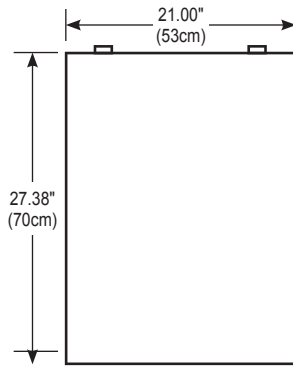

Items and Dimensions

ITEM NUMBER	WIDTH*	DEPTH	HEIGHT* (A)	CHANNEL SPACING	MAX PAN CAPACITY**	SHIPPING CLASS	SHIP WEIGHT	SHIP CUBE
DXP918	21" (53cm)	27.38" (70cm)	34.75" (88cm)	1.5" (4cm)	18	175	96 lbs (44 kg)	11.56
DXP922	21" (53cm)	27.38" (70cm)	40.75" (104cm)	1.5" (4cm)	22	175	100 lbs (45 kg)	13.56
DXP926	21" (53cm)	27.38" (70cm)	46.75" (119cm)	1.5" (4cm)	26	175	109 lbs (49 kg)	15.55
DXP933	21" (53cm)	27.38" (70cm)	57.25" (145 cm)	1.5" (4cm)	33	175	117 lbs (53 kg)	19.21
DXP936	21" (53cm)	27.38" (70cm)	63.25" (161 cm)	1.5" (4cm)	36	175	120 lbs (54 kg)	21.21
DXP941	21" (53cm)	27.38" (70cm)	69.25" (176 cm)	1.5" (4cm)	41	175	136 lbs (62 kg)	23.20
DXP941EX	21" (53cm)	27.38" (70cm)	69.75" (177 cm)	1.5" (4cm)	41	175	148 lbs (67 kg)	26.28
DXP941HD	21" (53cm)	27.38" (70cm)	69.75" (177 cm)	1.5" (4cm)	41	175	175 lbs (79 kg)	26.28

* Height includes casters
Custom height sizes and glide spacing available

** Pan capacities are for 18" x 26" sheet pans

Options

ITEM NO	DESCRIPTION
DXPLD	Lexan full-view door
DXPDD	Dutch door, only available on 941 units
DXPCH	Chest handles, set of 2
DXPEMB	Personalized embossment, 12 letters per line
DXPPH	Push handle
DXPI	Insulating transport cabinet
DXPB	Set of 4 non-marking rubber corner bumpers
DXPPB	Full perimeter non-marking bumper

ITEM NO	DESCRIPTION
DXPWV	Wheel brakes, set of 2
DXP5X2	Heavy-duty casters, set of 4
DXPCP	Correctional package, includes welded casters and hole in door latch for paddlelock
DXPCHT2	Canned heat tray insert
DXPY4	Polyurethane 4" casters DXPset of 4)
DXPY5	Polyurethane 5" casters DXPset of 4)
DXPFL	Floor lock

Please confirm that you have the most current specification sheet by visiting www.dinex.com.

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com