

UNIVERSAL ANGLE RACK

Compliant with
NSF/ANSI Standard 2



DXP612U

Item Numbers

DXP612U
DXP620U
DXPR618U (Roll-in)

Dinex Universal Angle Racks are designed for in-house foodservice facilities, bakeries, restaurants and high-activity operations handling trayed product. Roll-in sizes are available for walk-in refrigerators or freezers. Our fully welded frame and 0.5" aluminum tie bar avoids distortion and gives greater side-to-side strength.

Pan Glides

- Universal ledge angles set at 3" or 5" spacing
- Holds sheet pans or steam table pans
- Weld along entire edge of glides

Tie Bars And Continuous Weld

- 0.5" extruded aluminum tie bar keeps rack square
- Adds rigidity and stability to rack
- Two tie bars per unit
- No gaps to promote bacterial growth
- Solid Bottom

Dimensions

DXP612U – 24"W x 27.5"D x 69"H
DXP620U – 24"W x 27.5"D x 69"H
DXPR618U (Roll-in) –
24"W x 27.5"L x 64.75"H

Solid Bottom

- Rolled edge acts as bumper
- 12 gauge reinforcing caster channel eliminates twisting
- Fully welded corners
- Greatly enhances rack strength
- .125" thick aluminum

Superior Corner Supports

- 0.19" thick gussets provide superior strength
- Extruded 3-sided channel support
- All sides fully welded


Heavy-Duty Casters

- Plate casters for added rigidity and stability
- 5" x 1.25" sealed wheels
- each caster has a 350 lb capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility for superior performance, even in freezing temperatures

Warranty

One year parts and labor.

UNIVERSAL ANGLE RACK

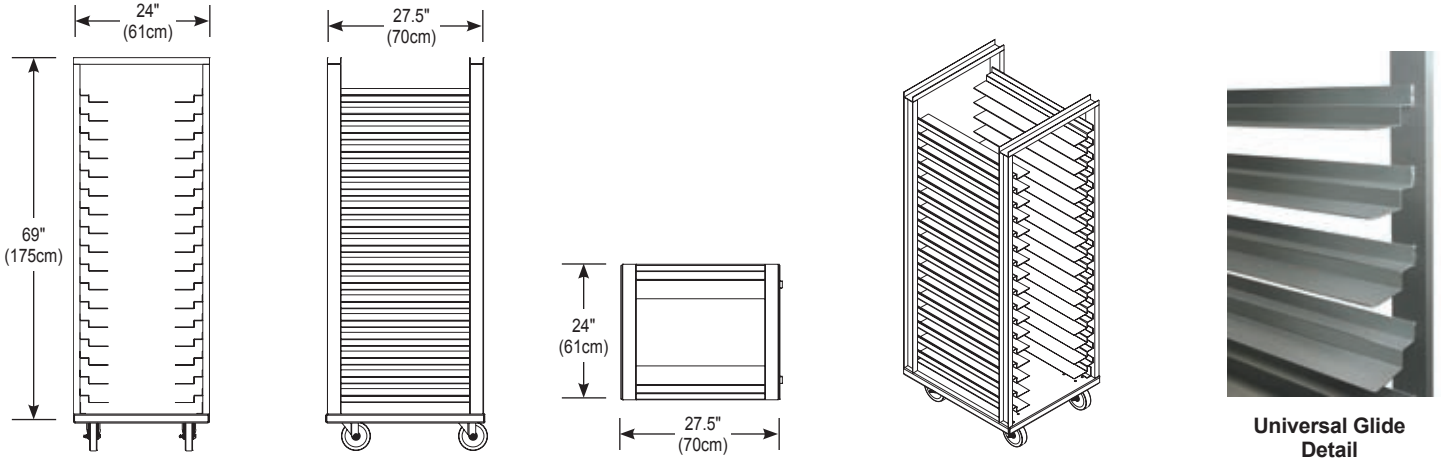

Dinex Superior Foundation

Featured on our toughest cabinets: Two 14 gauge aluminized steel reinforcing channels support our .080" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and heavy duty plate casters make this the strongest foundation in the industry.

Items and Dimensions

ITEM NUMBER	WIDTH	DEPTH	HEIGHT*	CHANNEL HEIGHT	MAX TRAY CAPACITY		MAX PAN CAPACITY			SHIP WEIGHT	SHIP CUBE
					18" X 26"	14" X 18"	12" X 20" X 2.5"	12" X 20" X 4"	12" X 20" X 6"		
DXP612U	24" (61cm)	27.5" (70cm)	69" (175cm)	5" (13cm)	12	24	24	12	6	95lb (43kg)	26.35
DXP620U	24" (61cm)	27.5" (70cm)	69" (175cm)	3" (8cm)	20	40	20	10	10	110lb (kg)	26.35
DXPR618U (Roll-in)	24" (61cm)	27.5" (70cm)	64.75" (164cm)	3" (8cm)	18	36	17	9	9	67lb (kg)	24.73

- * «Height includes casters.
- Custom height sizes and glide spacing available.
- Typical freight class: 100

Options

ITEM NO	DESCRIPTION
DXPPS	Pan Stop
DXPEMB	Personalized Embossment (12 letters per line)
DXPV	Vertical Bumpers
DXPWB	Wheel Brakes (set of 2)
DXPY5	5" Polyurethane Casters (set of 4)

ITEM NO	DESCRIPTION
DXPFL	Floor Lock
DXPPH	Push Handle
DXPB	Non-Marking Rubber Bumpers - Corner
DXPPB	Non-Marking Rubber Bumpers - Full Perimeter
DXP52	Heavy-duty Casters (set of 4)

Please confirm that you have the most current specification sheet by visiting www.dinex.com.

It is Dinex's policy to offer equipment which is design certified by companies that have been accredited at the federal level by the Occupational Safety and Health Agency (OSHA) and ANSI as a national recognized testing laboratory. These companies include CSA International, Underwriters Laboratories, Edison Testing Laboratories and National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

Dinex reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



DINEX®

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210 | 405.475.5600
www.dinex.com